


## TSPA-030100G25

### 典型的应用领域







- 生物医学
- 宽带发射
- 功率放大
- 实验测试用

### 外形尺寸

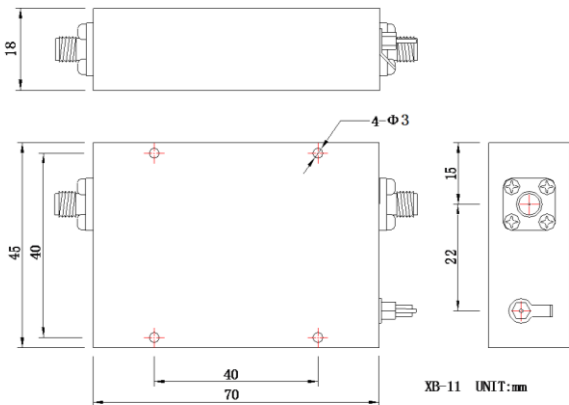

### 测试曲线 (Temp @+25°C)

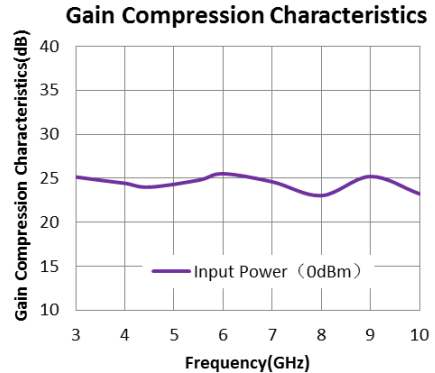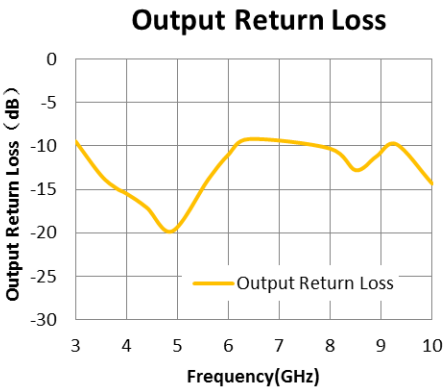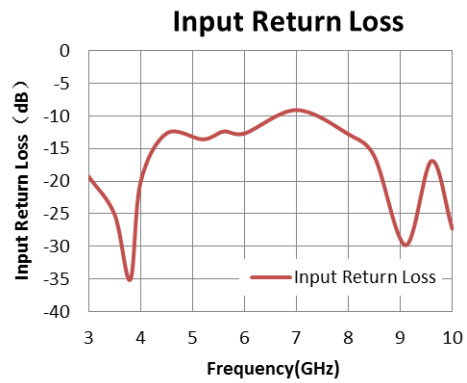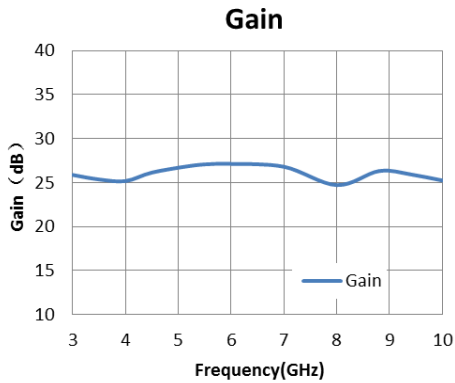

■ 频率范围	3.0GHz-10GHz
■ 增益	25dB typ
■ P1dB	25dBm typ

### 技术指标@25°C

频率范围	3.0GHz-10GHz
增益	25dB typ
增益平坦度	±2.0dB
P1dB	25dBm typ
OIP3	35dBm
输入驻波	2.0:1
输出驻波	2.0:1
电压	12.0 V
电流	300mA
工作温度	-20°C ~ 70°C
储存温度	-55°C ~ 100°C
极限电压	15V
最大入口功率	+10dBm

### 订单描述

TSPA-030100G25

